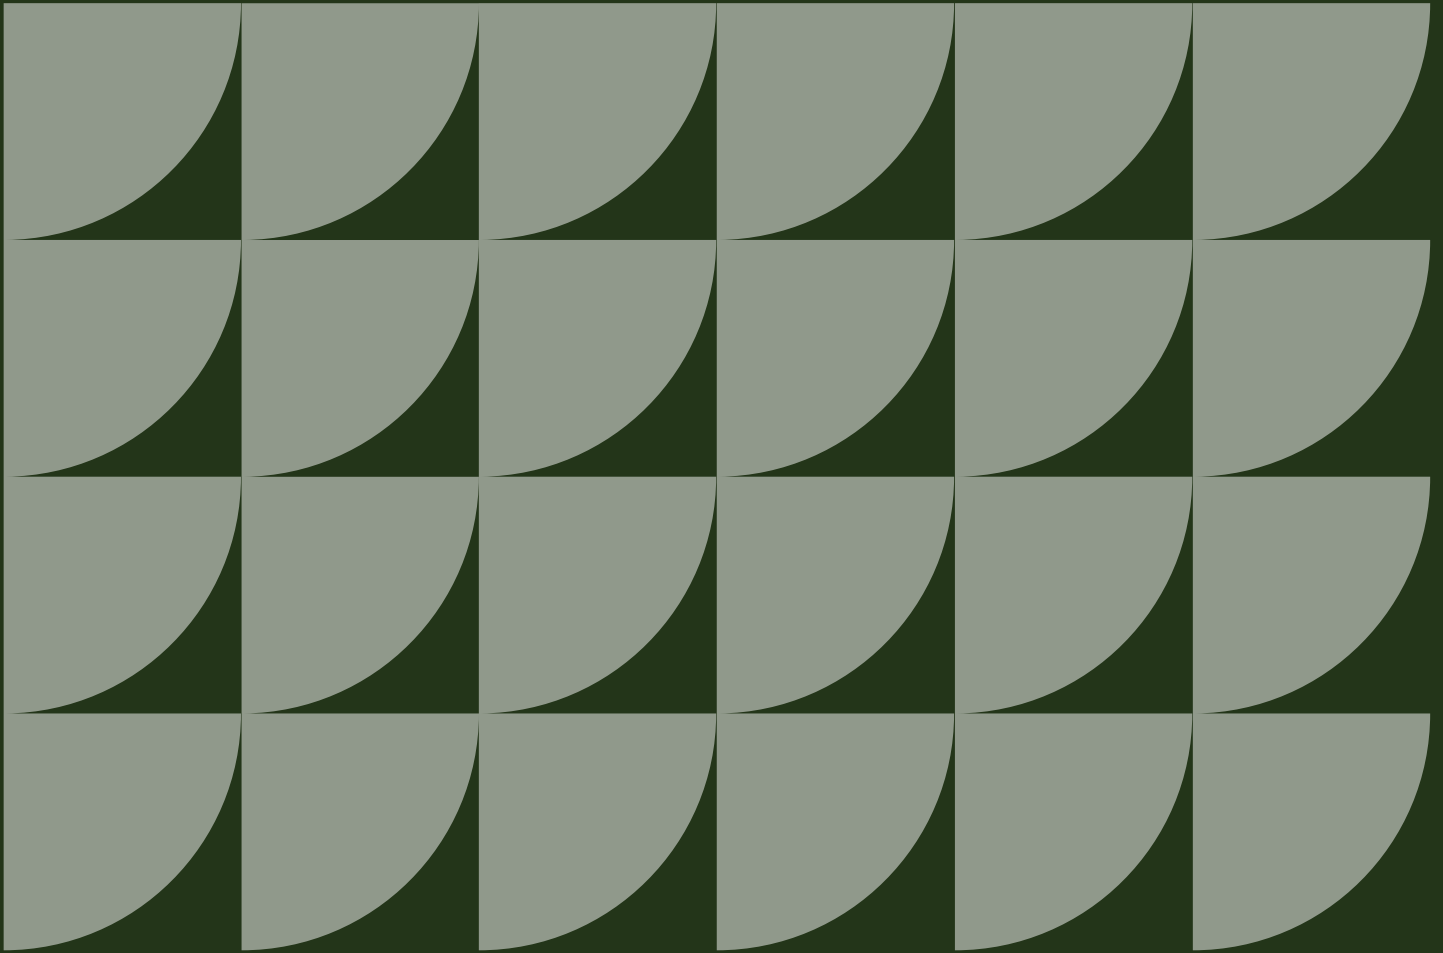




**conservation
studio**

External Hard Landscaping & Security Hardening

State Government Offices, Geelong

30-38 Little Malop Street, Geelong

Prepared for



Government
Services

Date: 11/08/2026

Revision: A

Document Information

Revision	Date	Comments
A	07/07/2026	For client review
	11/08/2026	Issue to client -RFI

Document Control

Internal Project Number	Approval
25063-25063b	DB

Disclaimer:

- The document is to be reproduced in full.
- The document does not relieve any other party of their responsibilities, liabilities and contractual obligations.
- This document excludes the identification of Hazardous Materials including asbestos.

Copyright and Moral Rights:


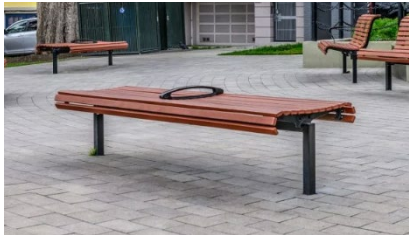
Conservation Studio Australia Pty Ltd asserts its Moral right in this work, unless otherwise acknowledged, in accordance with the Copyright Act 1968 (Cth). Conservation Studio’s moral rights include the attribution of authorship, the right not to have the work falsely attributed and the right to integrity of authorship.

Conservation Studio grants the client for this project (and the client’s successors in title) an irrevocable royalty free right to reproduce or use the material from this report, except where such use infringes the copyright and/or Moral rights of Conservation Studio or third parties. This report is subject to and issued in connection with the provisions of the agreement between Conservation Studio Australia Pty Ltd and its Client. Conservation Studio Australia Pty Ltd accepts no liability or responsibility for or in respect of any use of or reliance upon this report by any third party.

Contents

1.	Materials	1
----	-----------	---

1. Materials

Item and description	Indicative image	Supplier	Product/Model
EXTERIOR MATERIALS			
Tactile ground surface indicators Directional indicator paver, in dark colour.		Chelmstone – Design Concrete	Cautional Voodoo Tactile 300x300x40mm Colour: Voodoo
Tactile nosing High contrast colour carborundum safety stair nosings.		Safety Xpress	Aluminium Stair Nosing – Carborundum super anti slip insert – Black – 75mm x 30mm
Tiles External stair treads and risers		Better Exteriors	600x300x20 mm Ash grey flame treated granite tile
Benches Defensive bar installed to centre of bench, could be retrofitted to existing.		Ss Custom	Custom fabricated stainless-steel armrests (Grade 316, brushed finish), 2 per bench, fixed to bench structure.
Defensive protrusions Small stain steel angle square		ENCAT Australia	Product code: SDA01 Size: Custom made

Item and description	Indicative image	Supplier	Product/Model
Bollards Stainless steel surface-mounted bollard.		Street Furniture Australia	Wide Bollard, B3 with Dome head and single collar, stainless steel finish. Surface fixed Ø165L x 920mm H
PLANTER BOX			
Embedded paving system Resin bound stone paving finish to planter surfaces, with integrated design pattern.		Stone Set	Embedded paving system Resin bound stone paving (StoneSet Premium UVR or equivalent) to planter surfaces. Colour: Charcoal Stone Blen
Embedded paving system Resin bound stone paving finish to planter surfaces, with integrated design pattern.		Stone Set	Embedded paving system Resin bound stone paving (StoneSet Premium UVR or equivalent) to planter surfaces. Colour: Grey Stone Blend
Embedded paving system Resin bound stone paving finish to planter surfaces, with integrated design pattern.		Stone Set	Embedded paving system Resin bound stone paving (StoneSet Premium UVR or equivalent) to planter surfaces. Colour: Tan Stone Blend
Anti-loitering stainless steel bars Brushed stainless steel flat bars integrated within embedded paving, projecting above surface.		Ss Custom	316 Marine grade stainless steel, tensile 510-730 MPA hardness 150-127 HB. 12x6mm

Item and description	Indicative image	Supplier	Product/Model
LUMINAIRES			
Pole. Lighting pole.		BEGA	Luminaire pole with base plate. Material: Cast aluminium / aluminium. Finish: Graphite (BEGA coated and lacquered finish). Pole height: 4000mm. Pole diameter: 60mm shaft diameter. Refer to electrical engineers' specifications.
Pole adapter with G ½ threaded connection.		BEGA	Adapter made of cast aluminium and stainless steel Required recessed opening ø 30 mm for mounting on luminaire poles ø > 60 - 220 mm or on-site structures Max. weight of floodlight: 6,8 kg Colour graphite Refer to electrical engineers' specifications.
Performance floodlight		BEGA	Luminaire made of aluminium alloy, aluminium and stainless steel BEGA Unidure® coating technology Colour graphite Refer to electrical engineers' specifications.

Item and description	Indicative image	Supplier	Product/Model
Tesis New In-ground luminaire		ERCO	Housing: polymer, black. Longitudinally watertight cable 4x1.5mm ² , L 800mm. Refer to electrical engineers' specifications.
Wall Luminaire		BEGA	Luminaire made of aluminium alloy, aluminium and stainless steel BEGA Unidure® coating technology Colour graphite

NOTE: REFER TO ELECTRICAL ENGINEER'S DRAWINGS AND SPECIFICATIONS FOR ALL LIGHTING ACCESSORIES AND INSTALLATION REQUIREMENTS.

